







<https://doi.org/10.6063/motricidade.33520>

Research Note

Validation of the Aquanex system to assess in-water forces during aquatic exercise

Short title: Validation of the Aquanex system

Catarina C. Santos ¹, Mário J. Costa ^{2,3}, Daniel A. Marinho ^{1,4}, Nuno D. Garrido ^{4,5},
Tiago M. Barbosa ^{6,7}, Sérgio Rosa ⁶

¹ Department of Sports Sciences, Universidade da Beira Interior – Covilhã, Portugal.

² Faculty of Sports, University of Porto, Porto, Portugal

³ CIFI2D, Porto, Portugal.

⁴ Centro de Investigação em Desporto, Saúde e Desenvolvimento Humano – Covilhã, Portugal.

⁵ Department of Sports Sciences, University of Trás-os-Montes and Alto Douro, Vila Real, Portugal.

⁶ Polytechnic Institute of Bragança, Bragança, Portugal

⁷ Research Centre for Active Living and Wellbeing, Bragança, Portugal

***Corresponding author:** Departamento de Ciências do Desporto, Universidade da Beira Interior, Rua Marquês de Ávila e Bolama – CEP: 6201-001 – Covilhã, Portugal. E-mail: catarina.costa.santos@ubi.pt

Conflict of interest: nothing to declare. **Funding:** nothing to declare.

Received: 11/07/2023. Accepted: 03/13/2024.

ABSTRACT

The aim of this study was to perform a validation of the Aquanex system to assess in-water forces during aquatic exercise. One sensor (Type A) that composes the differential pressure system (Aquanex v.4.1, STR, USA) was placed inside a wind tunnel (Axial Propellor Fan, England), this last being considered as the gold standard technique for measurement. A frequency inverter was used to control a range of twenty-two frequencies. The mean force (F_{MEAN} , N) acting on the sensor and in the wind tunnel model was measured. The validation criteria were defined as follows: (i) $p > 0.05$ in a paired t-test; (ii) $R^2 \geq 0.49$ in a simple linear regression model; and (iii) at least 80 % of the plots within the limits of agreement in the Bland-Altman plots. The results showed no differences between both methods ($p = 0.884$). A significant relationship with a high effect ($R^2 = 0.573$, $p < 0.001$) was found, as well as a small bias (0.002 N) between the two methods. Thus, the Aquanex system seems to be valid for assessing the in-water forces as it meets all the validation criteria.

Keywords: Swimming, pressure sensors, resultant force, methods, device, kinetics

INTRODUCTION

The research interest in aquatic exercise related to sports performance or health and well-being increased remarkably in the past decades. It is consensual that swimming performance is mainly dependent on the swimmer's capacity to overcome water resistance by applying effective propulsive force in the water. On the other hand, the multidirectional load linked to the drag force acts favourably in developing body strength and promotes adherence to water fitness programs (Barbosa et al., 2009). Thus, the assessment of in-water forces is a key aspect of training control in competitive swimming (Santos, Marinho et al., 2021) and can help prescribe exercise in water fitness programs (Santos et al., 2019).

The assessment of in-water force has been done using different pressure systems (Santos et al., 2021). However, some are based on in-house customised devices that are not commercially available, integrating four to eight sensors (e.g., Takagi et al., 1999; Koga et al., 2022). In the last couple of years, a commercial system composed of two hand differential pressure sensors (i.e., Aquanex System) has been regularly used for research in swimming (Santos et al., 2021) and water fitness (Santos, Costa et al., 2021; Santos et al., 2019). In the specific case of swimming, this set-up allows displacement in front crawl without any constraints in stroke mechanics and efficiency (Santos et al., 2022a). Furthermore, it allows swift and real-time feedback for coaches and researchers to track down the in-water force data with accuracy (Santos et al., 2022b)

As far as our understanding goes, the system lacks validation for all aquatic activities and sports. Moreover, there is still no consensus on a gold standard method for measuring the in-water forces in the aquatic environment. So, the Wind Tunnel emerges here as an option for estimating hydrodynamic data (Hoffmann et al., 2016) and has been used regularly in cyclic sports for technology development (Bäckström et al., 2016). Therefore, this study aimed to validate the Aquanex System using the Wind Tunnel as a standard measurement

device. It was hypothesised that the Aquanex System would meet the validation criteria to assess in-water forces.

METHODS

Experimental design

A differential pressure system (Aquanex v.4.1, Model DU2, Swimming Technology Research, Richmond, USA) used in aquatic exercise (Santos, Costa et al., 2021) and previously reported as a reliable method in swimmers (Santos et al., 2022b) was considered for the present study. The Aquanex system is composed of two hand sensors commonly positioned between the third and fourth proximal phalanges and metacarpals of the practitioners (Santos et al., 2022b). For validity purposes, one sensor (Type A, 3.18 cm × 1.91 cm x 2.54 cm; 0.226 kg) was placed inside a subsonic open-circuit suction type Wind Tunnel (model C2, Armfield Limited, Ringwood, United Kingdom) composed of a test section (octagonal form, 30,4 cm x 30,4 cm x 45,7 cm) and a fan (Axial Propellor Fan, Armfield Limited, Ringwood, United Kingdom). The fan system allows the insufflation of the air inside the test section imposed by an electric motor frequency inverter (DV-700, Panasonic, Osaka, Japan).

The sensor was fixed vertically with a rigid iron oriented to the cone at the base of the test section inside the Wind Tunnel and attached to a two-channel A/D converter connected to a laptop with the Aquanex software (Figure 1). Before all measurements, the system was properly calibrated (force equal to zero) as previously reported (Santos et al., 2022b). The force output acquired with the system (in Newton, N) was derived by multiplying the pressure by the area (Santos, Marinho et al., 2021). To measure the mean force (F_{MEAN} , N) of both methods, the air was sucked through the test section by the fan located at the rear of the Wind Tunnel. A range of twenty-two frequencies (i.e., velocities) were controlled through the

frequency inverter starting at 12Hz and increasing by 2Hz, up to 54Hz. Afterwards, the F_{MEAN} acting on the sensor at each velocity was obtained by considering the frontal area of the sensor.

[Figure 1 about here]

Statistical analysis

The normality and homoscedasticity of the data were checked using the Shapiro-Wilk and Levene tests, respectively. The mean and one standard deviation ($M \pm 1SD$) were computed as descriptive statistics. A paired sample t-test was used to compare the F_{MEAN} between both methods. Simple linear regression models between both methods were computed for F_{MEAN} . As a rule of thumb, effect sizes were interpreted as: (i) very weak if $R^2 < 0.04$, weak if $0.04 \geq R^2 < 0.16$, moderate if $0.16 \geq R^2 < 0.49$, high if $0.49 \geq R^2 < 0.81$, and very high if $0.81 \geq R^2 < 1.0$. The Bland-Altman plots with 95% limits of agreement (LoA) were used to display the systematic differences between the two methods. The bias (mean difference), standard deviation (SD), and upper and lower LoA were calculated (Bland & Altman, 1986).

The validation was analyzed considering three validation criteria, as previously reported (Barbosa et al., 2011): (i) $p > 0.05$ in a paired t-test; (ii) $R^2 \geq 0.49$ in a simple linear regression model; and (iii) at least 80 % of the plots within the limits of agreement in the Bland-Altman plots. All statistical analyses were performed in the SPSS software (v.27, IBM, SPSS Inc., Chicago, IL, USA) and GraphPad Prism (v.9, GraphPad Software, San Diego, CA, USA).

RESULTS

No differences in F_{MEAN} were found when comparing the Aquanex System and the Wind Tunnel (Aquanex System: 0.250 ± 0.087 N, Wind Tunnel: 0.244 ± 0.086 N; $p=0.884$). Linear regression models between both methods showed significant relationships with a high effect ($R^2=0.573$, $p<0.001$) for F_{MEAN} (Figure 2). The Bland-Altman method revealed that 95.5 % of the plots (i.e., more than 80%) were within the upper and lower LoA (Figure 3), and the bias was small (0.002 N).

[Figure 2 about here]

[Figure 3 about here]

DISCUSSION

The key finding of this study is that the Aquanex system accomplished the three validation criteria regarding the signal acquisition compared to the Wind Tunnel, considered the gold standard.

Field-oriented research helps improve technology (Barbosa et al., 2023), and researchers and coaches can go deeper into the training evaluation process using cutting-edge experimental methods (Santos et al., 2023). Since they continually strive for more accurate methods to enhance performance (Mooney et al., 2015) or health/well-being (Santos et al., 2020), a boost in technological advances has been observed to get more friendly and ecological assessments that resemble as closely as possible water environment (Santos et al., 2022a). Ensuring high levels of validity and reliability is crucial to have accurate control (Atkinson & Nevill, 1998; Hopkins, 2000) and to avoid measurement errors or inter-individual differences that do not reflect the real context of practice (Hopkins et al., 1999). For instance, validation studies in aquatic exercise have been developed mainly for

physiologic and biomechanic purposes (e.g., Barbosa et al., 2011), protocols or measures (e.g., Colado & Brasil, 2019).

Although there is still no consensus on a gold standard method for measuring in-water forces, the existing tools should mimic as much as possible the movement pattern of the body limbs (Santos, Marinho et al., 2021). Within this, pressure sensors, namely the Aquanex System, allow a displacement throughout the water without constraints (Santos et al., 2022a). However, as far as our understanding goes, a specific validation of the system has not been reported yet. Hence, this study is the first to provide data about validation with the Aquanex System.

When comparing the Aquanex System and the Wind Tunnel, some tiny biases were found, which might be explained by the “nature” of the assessments and the interaction of the different fluids’ characteristics. For instance, water is more than 800 times dense than air (Carr, 2004), implying that the resistance to movement in this environment is higher than in air. Thus, the sensors can be highly sensitive to the air velocity while maintaining a pressure absence (which does not happen in the water). This can explain why the mean values were lower than those retrieved from the assessment conducted in a more ecological and valid environment (i.e., water) (Santos, Marinho et al., 2021; Santos et al., 2019; Santos et al., 2022b). Still, there is a high level of consistency on both the qualitative and quantitative levels when the Wind Tunnel is used to determine hydrodynamic data (Hoffmann et al., 2016).

Since this is the first step to validate the usefulness of a two-hand pressure system for in-water force measurements, a few limitations can be pointed out: (i) the use of a wind tunnel instead of a water channel to compare F_{MEAN} values and (ii) the assessments were made under the assumption that both sensors are equal. Future studies should try to use a

water channel in a broad range of variables (e.g., peak force or higher velocities) to see if the results follow the same trend.

CONCLUSIONS

The Aquanex System presented a high validation and accuracy. The system seems to be an appropriate device to assess the in-water forces in aquatic sports and exercise. This means that coaches and health professionals can use the Aquanex System to detect acute responses or long-term adaptations in human kinetics for performance, conditioning, or rehabilitation purposes.

REFERENCES

- Atkinson, G., & Nevill, A. M. (1998). Statistical methods for assessing measurement error (reliability) in variables relevant to sports medicine. *Sports Medicine*, 26(4), 217–238.
- Bäckström, M., Carlsson, P., Danvind, J., Koptyug, A., Sundström, D., & Tinnsten, M. A New Wind Tunnel Facility Dedicated to Sports Technology Research and Development. *Procedia Engineering*, 147, 62–67. <https://doi.org/10.1016/j.proeng.2016.06.190>
- Barbosa, T. M., Barbosa, A. C., Simbaña Escobar, D., Mullen, G. J., Cossor, J. M., Hodierne, R., Arellano, R., & Mason, B. R. (2023). The role of the biomechanics analyst in swimming training and competition analysis. *Sports Biomechanics*, 22(12), 1734–1751. <https://doi.org/10.1080/14763141.2021.1960417>
- Barbosa, T. M., Costa, M. J., Morais, J. E., Jesus, S., Silva, A., Batista, J., & Gonçalves, J. (2011). Validation of an integrated system to assess horizontal intra-cyclic velocity with a mechanical speedometer. In: Vilas-Boas, J., Machado, L., Kim, W., Veloso, A. (eds.). *Biomechanics in Sports*. *Portuguese Journal of Sports Science*, 29, pp. 833-835.
- Barbosa, T. M., Garrido, M. F., & Bragada, J. (2007). Physiological Adaptations to Head-Out Aquatic Exercises With Different Levels of Body Immersion. *The Journal of Strength and Conditioning Research*, 21(4), 1255. <https://doi.org/10.1519/r-20896.1>
- Bland, J. M., & Altman, D. G. (1986). *Statistical methods for assessing agreement between two methods of clinical measurement*. *Lancet* 1, pp. 307–310. doi: 10.1016/S0140-6736(86)90837-8
- Carr, G. (2004). *Sport Mechanics for Coaches*. Champaign, IL: Human Kinetics. p.117
- Colado, J. C., & Brasil, R. M. (2019). Concurrent and Construct Validation of a Scale for Rating Perceived Exertion in Aquatic Cycling for Young Men. *Journal of Sports Science & Medicine*, 18(4), 695–707.

- Hoffmann, K., Rasmussen, J. T., Hansen, S. O., Reiso, M., Isaksen, B., & Aasland, T. E. (2016). The use of wind tunnel facilities to estimate hydrodynamic data. *EPJ Web of Conferences*, 114, 02040. <https://doi.org/10.1051/epjconf/201611402040>
- Hopkins, W. G. (2000). Measures of reliability in sports medicine and science. *Sports Medicine*, 30(1), 1–15. <https://doi.org/10.2165/00007256-200030010-00001>
- Hopkins, W. G., Hawley, J. A., & Burke, L. M. (1999). Design and analysis of research on sport performance enhancement. *Medicine and Science in Sports and Exercise*, 31(3), 472–485. <https://doi.org/10.1097/00005768-199903000-00018>
- Koga, D., Tsunokawa, T., Sengoku, Y., Homoto, K., Nakazono, Y., & Takagi, H. (2022). Relationship Between Hand Kinematics, Hand Hydrodynamic Pressure Distribution and Hand Propulsive Force in Sprint Front Crawl Swimming. *Frontiers in Sports and Active Living* 4, 786459. <https://doi.org/10.3389/fspor.2022.786459>
- Mangia, A. L., Cortesi, M., Fantozzi, S., Giovanardi, A., Borra, D., & Gatta, G. (2017). The Use of IMMUs in a Water Environment: Instrument Validation and Application of 3D Multi-Body Kinematic Analysis in Medicine and Sport. *Sensors*, 17(4), 927. <https://doi.org/10.3390/s17040927>
- Mooney, R., Corley, G., Godfrey, A., Quinlan, L. R., & ÓLaighin, G. (2015). Inertial Sensor Technology for Elite Swimming Performance Analysis: A Systematic Review. *Sensors*, 16(1), 18. <https://doi.org/10.3390/s16010018>
- Santos, C. C., Barbosa, T. M., Costa, M. J. (2020). Biomechanical responses to water fitness programmes: a narrative review. *Motricidade*, 16(3), 205-215. <http://dx.doi.org/10.6063/motricidade.20052>
- Santos, C. C., Costa, M. J., Bartolomeu, R. F., Barbosa, T. M., & Rama, L. M. (2021). Force production and symmetry in water fitness exercises: a gender comparison. *Motricidade*, 17(4), 399-405. <https://doi.org/10.6063/motricidade.25565>
- Santos, C. C., Costa, M. J., Forte, P., & Marinho, D. A. (2023). A comparison of load cell and pressure sensors to measure in-water force in young competitive swimmers. *Journal of Biomechanics*, 160, 111815. Advance online publication. <https://doi.org/10.1016/j.jbiomech.2023.111815>
- Santos, C. C., Marinho, D. A., & Costa, M. J. (2022a). The mechanical and efficiency constraints when swimming front crawl with the Aquanex System. *Journal of Human Kinetics*, Advance online publication. <https://doi.org/10.2478/hukin-2022-0090>
- Santos, C. C., Marinho, D. A., & Costa, M. J. (2022b). Reliability of using a pressure sensor system to measure in-water force in young competitive swimmers. *Frontiers in Bioengineering and Biotechnology*. Advance online publication. <https://doi.org/10.3389/fbioe.2022.903753>
- Santos, C. C., Marinho, D. A., Neiva, H. P., & Costa, M. J. (2021). Propulsive forces in human competitive swimming: a systematic review on direct assessment methods. *Sports Biomechanics*, Advance online publication. <https://doi.org/10.1080/14763141.2021.1953574>
- Santos, C.C., Rama, L.M., Marinho, D.A., & Barbosa, T.M. (2019). Costa, M.J. Kinetic Analysis of Water Fitness Exercises: Contributions for Strength Development. *International Journal of Environmental Research and Public Health*, 16, 3784. <https://doi.org/10.3390/ijerph16193784>

Takagi, H., & Wilson, B. (1999). Calculating hydrodynamic force by using pressure difference in swimming. In K. Keskinen, P. Komi, and A. P. Hollander (eds.) *Biomechanics and Medicine in Swimming VIII*. Jyväskylä, Finland: Gummerus Printing, 101–106.

Manuscript Draft

Figure 1. The assessment setup with the Wind Tunnel (A), Type A sensor (B) and Aquanex system (C).



Manuscript

Figure 2. Scattergram with the main trendline (solid line), 95% confidence interval (dotted lines), and determination coefficient (R^2). N, newton; F_{MEAN} , mean force.

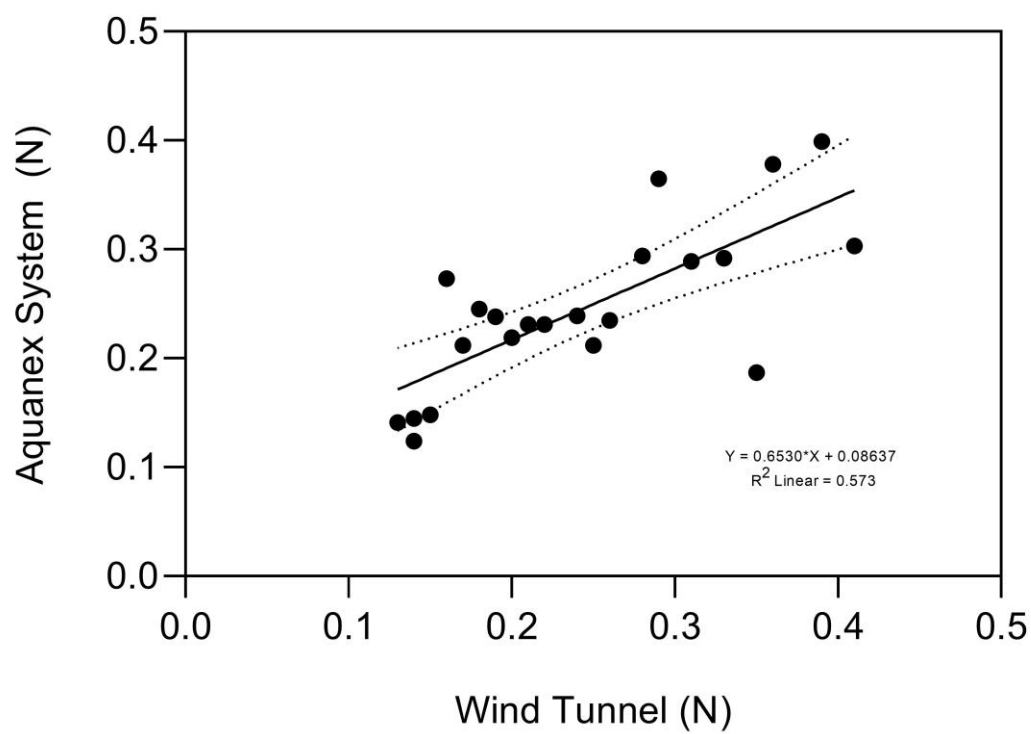


Figure 3. Bland-Altman plots of the difference between Aquanex System and Wind Tunnel (y-axis) and mean of measurements (x-axis). Dotted lines represent the upper and lower 95% LoA (mean differences ± 1.96 SD of the differences), and solid lines represent the mean differences between the two methods (bias). N, Newton; F_{MEAN} , mean force

